

# ANDES SERIES

**ANDES** realistically represents a mixture of stone surfaces with a focus on texture and natural colour. Available in a wide range of sizes and two finishes, Andes can be used for both residential and commercial applications.



**PRODUCT TYPE:** Glazed porcelain

**COLOURS:** Warm White, Almond Beige, Grey and Charcoal

**SIZES:** 60x200mm, 300x300mm, 300x600mm, 400x600mm, 600x600mm, 600x600x20mm and 600x1200mm  
Rectified Edges

**FINISHES/USAGE:**

**AESTHETIC QUALITIES:**

**ORIGIN:**


**TECHNICAL DATA:**

Matt, Grip, Paver and Paver Coping/Wall and Floor **VARIATION:**

Mix stone surface

N/A

P2 Pendulum Slip rating (Matt)  
P5 Pendulum Slip rating (Grip and Paver)  
More technical data on last page



V3

# ANDES SERIES

## PRODUCT INFORMATION



### Warm White

Matt	60x200mm   300x300mm   300x600mm 600x600mm   600x1200mm
Grip	300x600mm   600x600mm
Grip Paver	600x600x20mm
Paver Coping	400x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# ANDES SERIES



## Almond Beige

Matt	60x200mm   300x300mm   300x600mm 600x600mm
Grip	300x600mm   600x600mm
Grip Paver	600x600x20mm
Paver Coping	400x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# ANDES SERIES



## Grey

Matt	60x200mm   300x300mm   300x600mm 600x600mm   600x1200mm
Grip	300x600mm   600x600mm
Grip Paver	600x600x20mm
Paver Coping	400x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



# ANDES SERIES



## Charcoal

Matt	60x200mm   300x300mm   300x600mm 600x600mm
Grip	300x600mm   600x600mm
Grip Paver	600x600x20mm
Paver Coping	400x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# ANDES SERIES

## WARM WHITE VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces



# ANDES SERIES

## ALMOND BEIGE VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

# ANDES SERIES

## GREY VARIATION





- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces



# ANDES SERIES



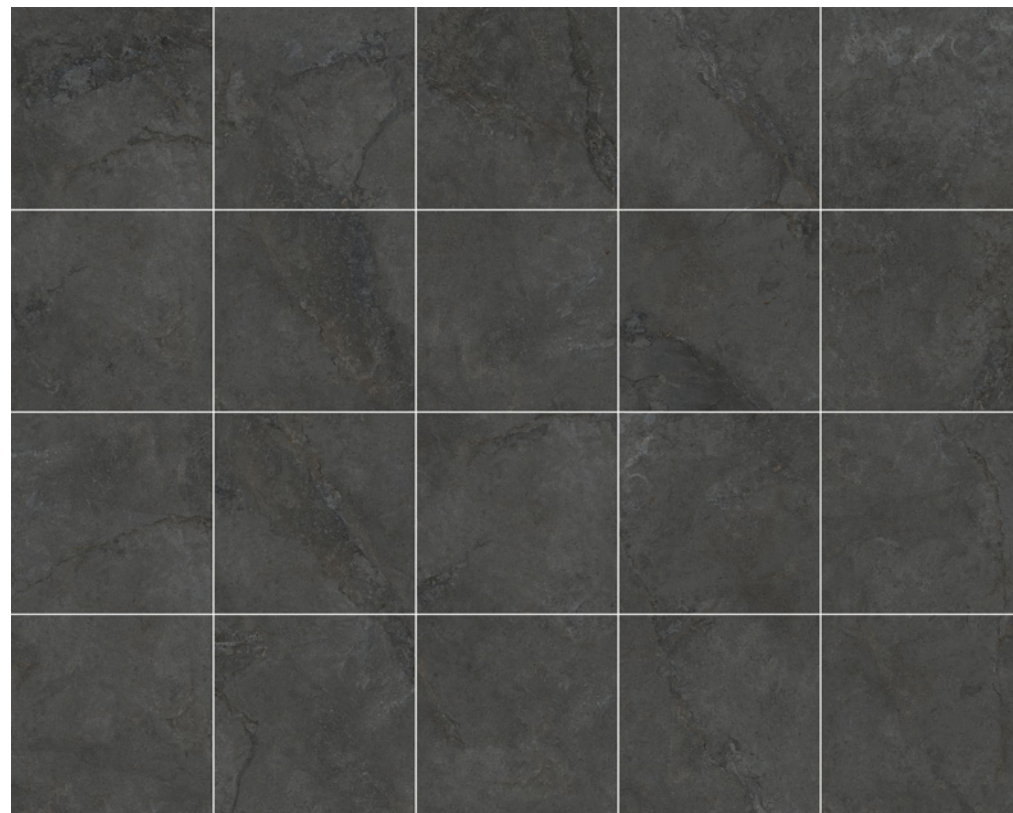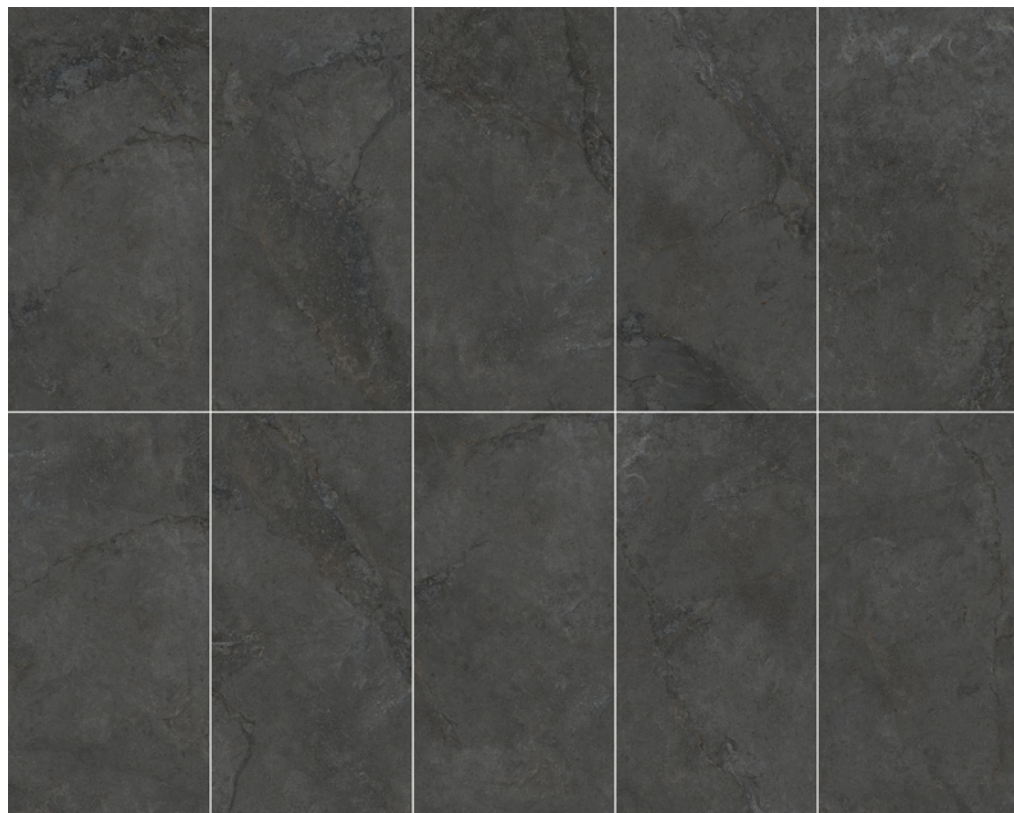



## CHARCOAL VARIATION



- **600x1200mm** - 10 tile faces
- **600x600mm** - 20 tile faces

# ANDES SERIES


## TECHNICAL DATA - TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$
	breaking strength	ISO 10545-4	$\geq 1300\text{N}$	2265N
	shock resistance	ISO 10545-11	Pass	Pass
	chemical resistance	ISO 10545-13	Declared value	Pass
	resistance to frost	ISO 10545-12	Resistant	Pass
	staining resistance	ISO 10545-14	Minimum Class 3	Pass



# ANDES SERIES

## TECHNICAL DATA - PAVER

	technical characteristics	result
	water absorption	$\leq 0.5\%$
	breaking strength	12061N
	max warpage	$\pm 2.0\text{mm}$
	max edge curvature	$\pm 2.0\text{mm}$
	chemical resistance	Pass
	resistance to frost	Pass
	staining resistance	Pass

Porcelain Pavers and Coping tiles must be installed to Australian Standards (AS 3958.1, AS 3958.2 & AS 3727-2016) using correct procedures and products such as Mapei Ultralite S1.

No spot fixing under any circumstances.

